

The Fuel Cell: Science and Technology

Bruce Chehroudi, PhD, *Raytheon*

●● In this series of tutorial the basic operation and applications of the fuel cells are discussed in the context of the automotive industry. This issue, gives a brief description of the anatomy of a typical fuel cell and the available choices for key components.

The history goes back to 1839 when Sir Willam. R. Grove, a British physicist, developed the principles of the production of electricity through electrochemical union of the oxygen and hydrogen. Francis Bacon generated the first practical cells in 1932. Its first major application occurred in 1965 by NASA as power source in Gemini spacecraft. Its consideration in automotive industry is primarily because of its clean operation, emitting only water vapor.

The basic design of a typical fuel cell consists of two electrodes, anode and cathode, and an electrolyte as shown in Figure 1. Fuel cell directly converts chemical energy into electricity. As opposed to conventional batteries, where electrodes themselves are consumed, fuel cells use hydrogen and oxygen gases to produce electricity. Hydrogen atoms release electrons which transport through the wire connecting the two electrodes. Then these electron-removed hydrogen atoms (called ions, and in this case, protons) attempt to diffuse through the electrolyte to reach the cathode side joining the oxygen atoms and the elec-

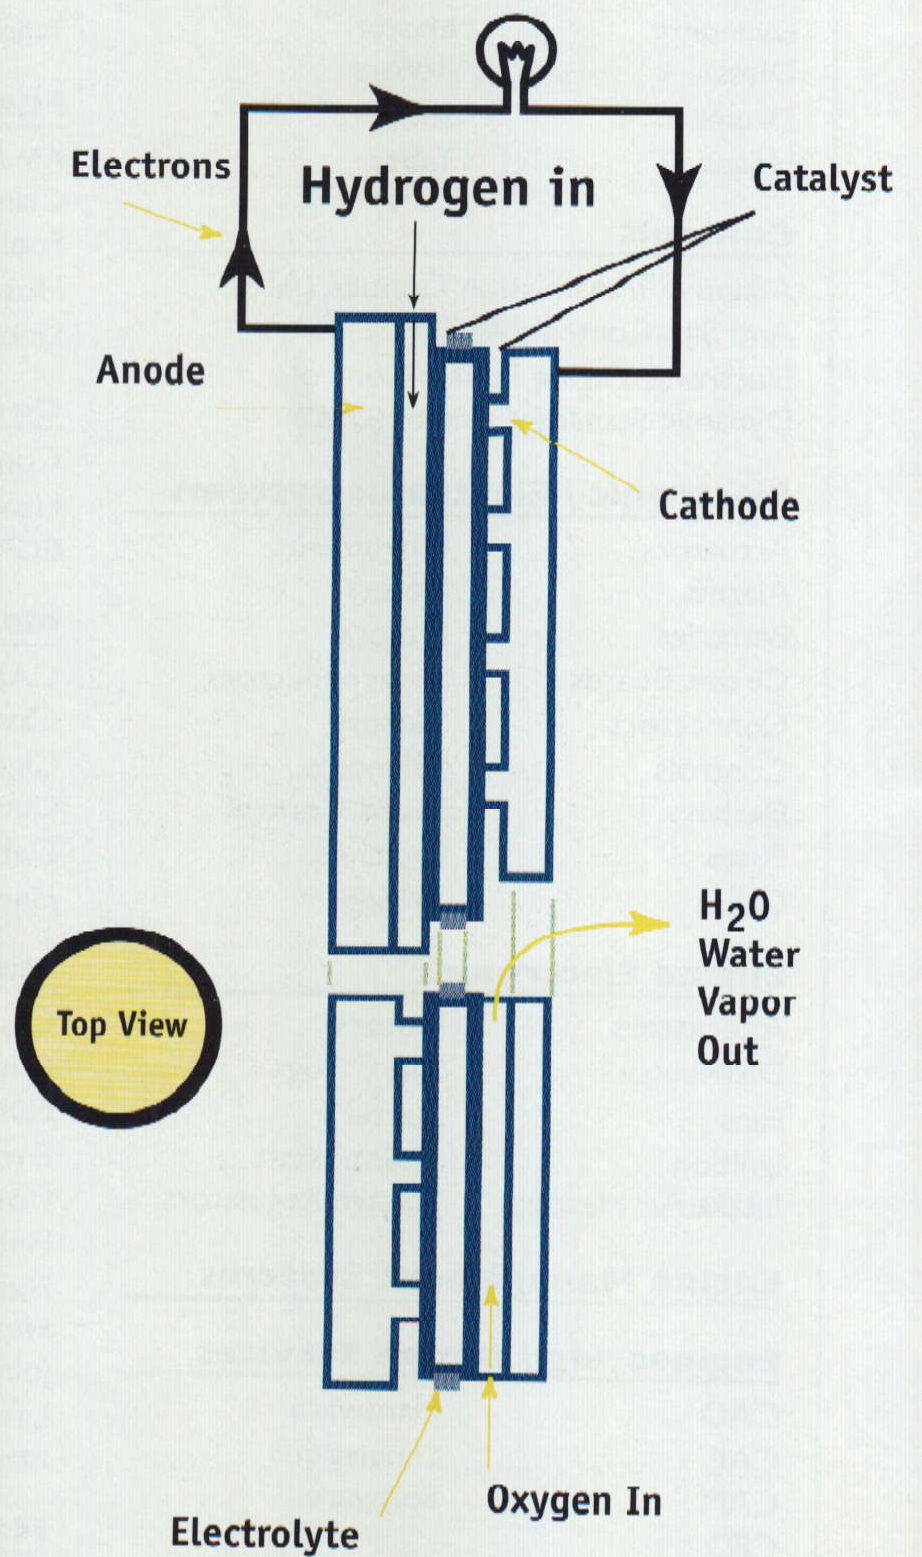


Figure 1. Anatomy of a typical fuel cell. The catalyst size is exaggerated, it is a thin layer of platinum bonded to either side of the electrolyte (PEM-type). Platinum-coated carbon electrodes are often used. Hydrogen and oxygen are fed to the electrodes on either side of the PEM through channels formed in their flow field plates.

trons arriving through the wire to produce water. To speed up this process, a thin layer of platinum catalyst is used on both sides as shown in Figure 1. Output of a single cell is typically 0.6 to 0.8 volts, and when many (200 to 300) of these are stacked, there is sufficient energy to, for example, power a 50kW (or 67hp) 3-phase synchronous motor. Energy conversion efficiency of 45 to 60% has been demonstrated. Note that current internal combustion (IC) engine efficiency may rise to about 35%. Hence, the potential for simultaneous achievement of zero emission and high efficiency exists. Efficiency losses in fuel cells stem mainly from the electrical resistance of the electrolyte and spatial nonuniformity of its concentration. Measures to reduce these losses include application of strongly acidic or alkaline electrolytes. Some key characteristics of four major types of electrolytes are given below.

Alkaline electrolyte:

- Must be supplied with clean hydrogen (no CO₂). Otherwise, CO₂ reacts with the electrolyte and produces solid carbon.
- Much less platinum is required than the acidic ones.

Acidic electrolyte:

- Insensitive to presence of CO₂.
- Because typically they require water to conduct H⁺ (i.e. proton), cells must be operated below the boiling point of water.
- Exception to the above is the concentrated phosphoric acid type which can function as high as 200°C (or 390°F). However, they do need a warm-up period of hours. Conversion efficiencies of about 45%.

Synthetic polymers as electrolyte:

- Such as DuPont's Nafion contains sulfuric acid compound that allows easy diffusion of protons.
- It is shaped as a membrane in between the electrodes of this design are referred to as proton exchange membrane (PEM) fuel cells. A membrane-electrode assembly cell can be as small as 2.5 millimeter (or 0.1 inch).
- They run at about 80° C (or 176° F).
- Expensive as it requires platinum catalyst.
- Energy densities of about 1.0 kW/kg (or 0.6 hp/lb).

Solid oxides:

- It uses hard ceramic material. For example, zirconium oxide stabilized with yttrium oxide. In one design, a 40-micron thick layer of this electrolyte is deposited on a lanthanum manganite (air-side) electrode surrounded by the nickel embedded in yettria-stabilized zirconia (fuel-side) electrode. Both electrode materials must be good electrical conductors and porous to allow flow of air and fuel through them to reach on either side of the electrolyte.
- Negatively-charged oxygen ions migrate from the cathode side towards the anode to form water with hydrogen.
- Operating temperature of about 980° C (or 1800° F).
- Conversion efficiency approaching an impressive 60%.
- Energy densities of about 10 kW/kg (or 6 hp/lb).

To improve the performance, fuel cells are operated at elevated pressure to increase the diffusion rate of hydrogen and oxygen

and also facilitate outflow of water which otherwise tends to clog the cathode gas channels. Also, unpressurized operation using permeable-graphite-containing microscopic pores were used to control water movement.

This completes a concise description of the anatomy and the basic operation of fuel cells. Applications of this technology are described in the next issue of the Powertrain International. ●●

inside

inside

Publisher & President	Janet E. Uddin
Editor-in-Chief	M. Nasim Uddin, PhD
Editor	Richard A. Wright
Editorial Director	Bruce Chehroudi, PhD
Associate Editor	Jenny L. King
Advertising	Joeal Butkovich
Circulation	Jennifer Secorski
Art Direction	Dennis Guastella Laura Hower
GPC 2001	Tanvir Anmad, PhD
Directors-at-Large	David Anderson Jack Ekchian, PhD Joseph Lugo Katsuji Hidaka Steven Hugg Ike Iaconelli Akihiro Iiyama, PhD Heinz Lemberger Emanuele Leveroni, PhD Karl E. Nureikal Andre Rault, PhD David M. Roessler, PhD Roger Saillant Joseph Scalisi Kimihiro Shibata, PhD M. Nasim Uddin, PhD James W. Welton

© 2000 Copyright by Powertrain International, Inc. Powertrain International is published four times annually as the official publication of Global Powertrain Congress. Offices are located at 3200 E. 12 Mile Road, Ste. 201, Warren, MI 48092-5261, telephone (810) 558-5710, telefax (810) 558-5712.

www.powertrain-intl.com

Printed in Canada

FEATURES



PROPULSION

There's No Fuel Like an Old Fuel11

M. Nasim Uddin • *Powertrain International*

A Series Hybrid Electric Drivetrain Configuration Using a DC/DC Converter for the Coupling of a High Voltage DC Link to Various Storage Systems20

Herbert Kabza, Christian Koerner, Peter Seger, Andreas Wagener • *University of Ulm*

Hybrid Electric Vehicles— Discussion of Different Configurations40

Frank Mueller, Peter Lueck, Siegfried Koehle • *Volkswagen*



ENGINE

Intake Valve Lift Strategies for an Unthrottled Engine at Low Load Conditions26

Chao Daniels, Mike Dong, Min Xu, Grant Chen • *Visteon*

Development of Thermoplastic Cam Covers30

Charles Spurrell • *Freudenberg-NOK*



TRANSMISSION

Continuously Variable Power Split Transmission Concept (CVPST) in Hybrid Vehicles16

Marek Kmicikiewicz, Ben Cowan • *CKE Technologies*

Victor H. Mucino • *West Virginia University*

DEPARTMENTS

Editor's Message2

Meet the Contributors4

Powertrain Tutorial8

next issue

NVH, CVT, New Engine Development and New Transmission Development

Cover: Honda Insight

meet the contributors

Bruce Chehroudi, PhD, *Raytheon STX*

Dr. Bruce Chehroudi is a Chief Scientist at Raytheon STX. He has worked in the areas of internal combustion engines, structure of sprays (their formation and combustion), gas turbine engines, furnace combustion, and emission of pollutants. Dr. Chehroudi served as a Research Staff Member of Princeton University Engine Laboratory. He has more than 70 publications in conferences, national and international journals.

Grant Chen, *Visteon*

Mr. Grant Chen is a supervisor at Visteon. He graduated from Polytechnic Institute of New York with a master's degree in Mechanical Engineering and earned a master's degree in Engineering Management from Wayne State University. He has many years of design, CAE analysis, prototype and test experience of powertrain subsystems and components. He is currently engaged in injector spray and engine combustion systems activities.

Ben Cowan, PhD, *CKE Technologies*

Dr. Ben Cowan is the President of CKE Technologies Inc., Montreal, Canada. He was involved in various projects related to pulp mills, paper machines, steam and power plants, and others for 40 years.

Herbert Kabza, PhD, *University of Ulm*

Dr. Herbert Kabza graduated from the Ludwig-Maximilians-University Munich with a diploma in physics. After finishing his PhD thesis there, too, in 1979 he joined Siemens where he was engaged in microelectronics and power semiconductor development. In 1996 he started up the Department of Energy Conversion and Storage at the University of Ulm where he is engaged in research on distributed energy systems and hybrid drive configurations.

Mark Kmicikiewicz, *CKE Technologies*

Mr. Mark Kmicikiewicz is the Vice-President and Chief Engineer of CKE Technologies Inc., Montreal, Canada. He has many years of design, test and fabrication in Powertrains Systems.

Christian Koerner, *University of Ulm*

Mr. Christian Koerner has been a research assistant at the Department of Energy Conversion and Storage at the University of Ulm since 1997. He studied Electrical Engineering at the RWTH Aachen with emphasis on electric machines and power engineering.

Frank Mueller, *Volkswagen*

Mr. Frank Mueller is project leader for drive trains in the department for electric and hybrid vehicles of the Volkswagen research division. He joined Volkswagen with the International Trainee Program. He graduated from the Technical University of Munich with a diploma in mechanical engineering and studied for one semester at the University of California at Berkeley.

Victor H. Muncino, PhD, P.E., *West Virginia University*

Dr. Victor H. Muncino, P.E. is an Associate Professor in the Department of Mechanical and Aerospace Engineering at West Virginia University. His areas of expertise include Mechanical Engineering Design, Computer Aided Design, Dynamics and Kinematics of Machinery, Bioengineering and Finite Element Analysis.

Peter Seger, *University of Ulm*

Mr. Peter Seger has been a research assistant at the Department of Energy Conversion and Storage at the University of Ulm since 1996. He studied Electrical Engineering at the University of Kaiserslautern with emphasis on power engineering.

Charles Spurrell, *Freudenberg-NOK*

Charles Spurrell currently works at Freudenberg-NOK as senior project engineer in Manchester, New Hampshire. He received a BS in Mechanical Engineering from the University of Massachusetts-Lowell and holds an MS in Manufacturing Management from GMI Engineering and Management Institute. He is planning to graduate from the University of Massachusetts-Lowell with an MS in Plastic Engineering in May 2000.

Andreas Wagener, *University of Ulm*

Mr. A. Wagener has been a research assistant at the Department of Energy Conversion and Storage at the University of Ulm since 1996. He studied Electrical Engineering at the University of Erlangen with emphasis on power electronics and control engineering.